
Industrial | Custodial | Commercial | Healthcare | Education | Public Space | Rail

Vandalite. LIGHTING

ENERGY SECURE




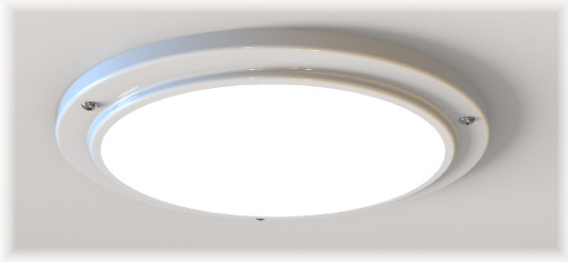


Economical | LED | IP65 | IK10-100J

Vandal Resistant | Emergency Lighting | Dimmable | Fluorescent Options

- Vandal Secure Downlight
- Recess & Surface Version
- Latest LED Technology
- Integral Gear or Gear Box Options
- Polycarbonate or Optional GRP Flat Panel
- Heavy Gauge Weatherproof Aluminium or Steel Bezel
- Stainless Steel Security Screws

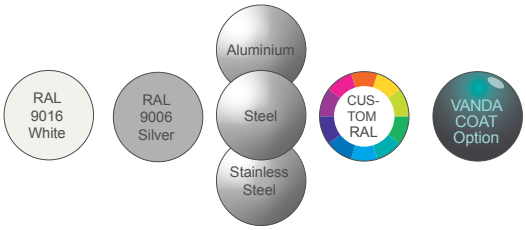

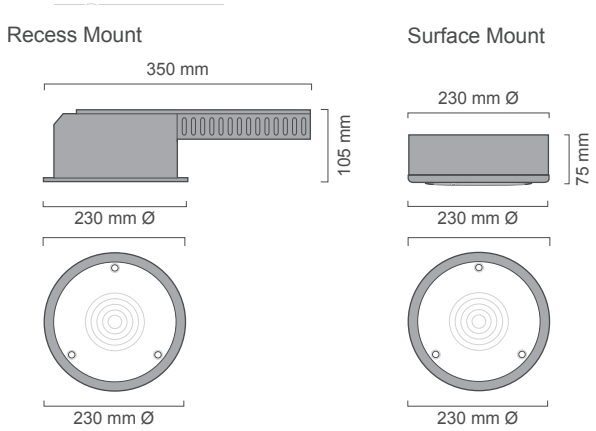

Recess Cut Out Dimensions	Recess Flange Dimensions
215 mm Ø	230 mm Ø

Standard Fixing Detail

3qty x T-Slot Side Arm Recess Mounting Brackets
1qty x 20mm Ø Back Body Centre Cable Entry Hole
Optional Back Body Mounting (on request)

LED Technical Information

Please refer to website for current LED technical specification

Order Code	Lumen	mA	lm/W	W	Colour Temp	Ra	Weight
	Lm	forward current	Lumen efficacy	Circuit Wattage	Kelvin (K)	CRI	Kg
NRGS 1.2LED	1250lm	350	117	10.6	3000K/4000K	>80	4.0
NRGS 1.7LED	1750lm	500	114	15.3	3000K/4000K	>80	4.0
NRGS 2.1LED	2100lm	600	112	18.7	3000K/4000K	>80	4.0
NRGS 2.5LED	2550lm	700	105	24.2	3000K/4000K	>80	4.0

Specific higher/lower lumen packages on request (above are LED comparable to PL lamp options)

RGB Colour Change LED & **Tuneable White LED options

Ordering Options

Description	Suffix Ordering Code
Recess Mount Version	/RM
Surface Mount Version	/SM
Exterior Fully Weatherproof IP65 Version *(No T-SLOT)*	/EXT
Dimmable Options *(DALi/1-10v/Sw-240v/Corridor)*	/DALi /1-10v /SW-240v /CORR
Integral 3hr Emergency or 3hr Self Test	/EM3 or /EM3-SELF
Microwave Motion Detection	/M-Wave
Night Light	/NL
*RGB Colour Change LED	/RGB-LED
**Tuneable White LED	/TUNE
Frosted Flat Panel Diffuser	/FL-F
Clear Stippled Flat Panel Diffuser	/FL-P
Security Driver/Key	/SD

CE

5 YEAR WARRANTY
LED = L80B10 at 50,000 hours @ 25°C
(Full terms & conditions on request)