
Industrial | Custodial | Commercial | Healthcare | Education | Public Space | Rail


ETON SECURE

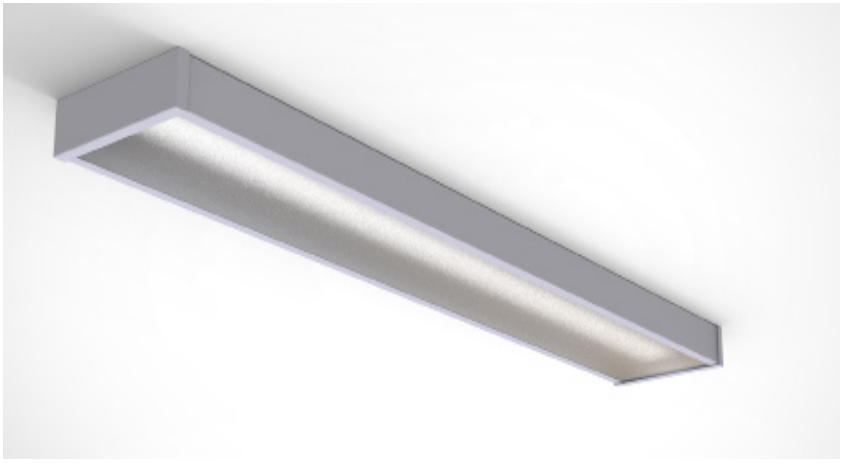

Economical | LED | IP44 | IK10-35J | Vandal Resistant | Optional Motion Detection | Dimmable | Fluorescent Options

- Decorative Slim Design Steel Body
- Fully Welded Steel Construction
- Secure Protective Frame
- Frosted or Clear Captive Polycarbonate Cover
- Stainless Steel Security Screws

White | CUS-TOM RAL | VANDA COAT Option

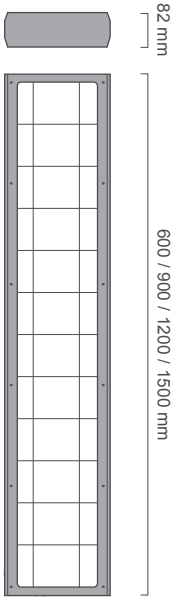

Standard Fixing Detail
4qty x 6mm Ø Back Body Corner Mounting Holes
1qty x 20mm Ø Back Body Centre Cable Entry Hole

Linear LED Technical Information

Please refer to website for current LED technical specification

Order Code		*Length*	*Lumens*		*lm/W*	*W*	*Colour Temp*	*Ra*	*Weight*
	HE	*HO* *mm*	*HE*	*HO*	*Lumen efficacy*	*Circuit wattage (HE) (HO)*	*Kelvin (K)*	*CRI*	*Kg*
ETNS	*1.3*	*2.6* 600	1300lm	2600lm	115	13.8 - 25.2	3000K/4000K	>80	5.0
ETNS	*1.9*	*3.9* 900	1950lm	3900lm	112	19.9 - 37.4	3000K/4000K	>80	6.0
ETNS	*2.6*	*5.2* 1200	2600lm	5200lm	110	26.1 - 49.8	3000K/4000K	>80	7.0
ETNS	*3.2*	*6.5* 1500	3250lm	6500lm	108	32.6 - 62.7	3000K/4000K	>80	8.0

Specific higher/lower lumen packages on request (above are LED comparable to T5 lamp options)

Ordering Options

Description	*Suffix Ordering Code*
Slim Body Version	*/SLIM*
Dimmable Options *(DALi/1-10v/Sw-240v/Corridor)*	*/DALi / 1-10v / SW-240v / CORR*
Integral 3hr Emergency or 3hr Self Test	*/EM3 or /EM3-SELF*
Microwave Motion Detection	*/M-Wave*
Night Light	*/NL*
Frosted Diffuser	*/F*
Clear Stippled Diffuser	*/P*
Security Driver/Key	*/SD*
Stainless Steel Version *(316/304/430 Grades)*	*On Request*
LED Linear Tube Gear Tray *(240v Mains)*	*/GT-LEDT5*
Fluorescent Lamp Version	*/T5 or /T8 On Request*

5 YEAR WARRANTY
LED = L80B10 at 50,000 hours @ 25°C
(Full terms & conditions on request)

CE

+44 (0)1422 354 254 enquiries@vandalite.uk www.vandalite.uk