

Industrial | Custodial | Commercial | Healthcare | Education | Public Space | Rail

Vandalite. LIGHTING

HI RAK LED LOW BAY

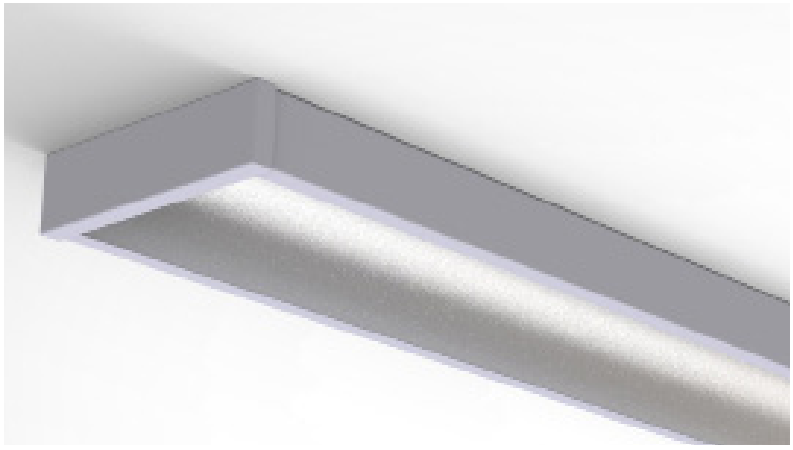

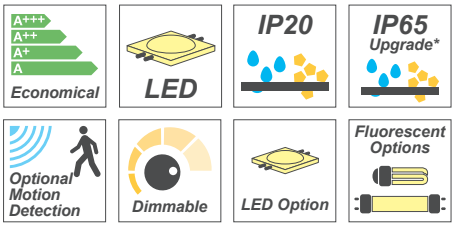

White | Dark Grey | CUS-TOM RAL | VANDA COAT Option


- Surface Mounted
- High Grade Polished Aluminium Reflectors
- DALi Dimmable & Separate Switching Options
- Excellent Efficiency & Photometric Performance
- Optional Clear Ploycarbonate Panel (IP65*)
- Optional Wire Guard
- Removable LED Gear Tray

Linear LED Technical Information

Please refer to website for current LED technical specification

Order Code			Length	Lumens		lm/W	W	Colour Temp	Ra	Weight
	HE	HO	mm	HE	HO	Lumen efficacy	Circuit (HE) wattage (HO)	Kelvin (K)	CRI	Kg
HIR	1.3	2.6	600	1300lm	2600lm	115	13.8 - 25.2	3000K/4000K	>80	8.0
HIR	1.9	3.9	900	1950lm	3900lm	112	19.9 - 37.4	3000K/4000K	>80	10.0
HIR	2.6	5.2	1200	2600lm	5200lm	110	26.1 - 49.8	3000K/4000K	>80	12.0
HIR	3.2	6.5	1500	3250lm	6500lm	108	32.6 - 62.7	3000K/4000K	>80	14.0

Specific higher/lower lumen packages on request (above are LED comparable to T5 lamp options)

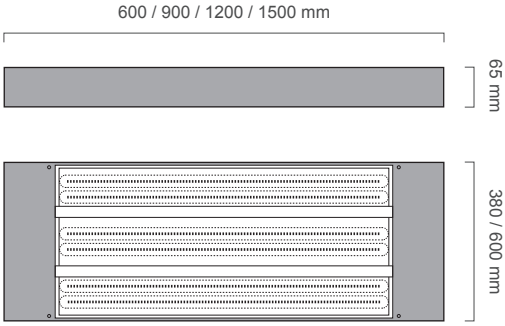

Ordering Options

Description	Suffix Ordering Code
Surface Mounted Body Version	/SM
Recess Mounted Body Version	/RM
Exterior Fully Weatherproof Version	/EXT
Dimmable Options *(DALi/1-10v/Sw-240v/Corridor)*	/DALi / 1-10v / SW-240v / CORR
Integral 3hr Emergency or 3hr Self Test	/EM3 or /EM3-SELF
Microwave Motion Detection	/M-Wave
Night Light	/NL
Frosted Diffuser	/F
Clear Stippled Diffuser	/P
Security Driver/Key	/SD
Stainless Steel Version *(316/304/430 Grades)*	On Request
LED Linear Tube Gear Tray *(240v Mains)*	/GT-LEDT5
Fluorescent Lamp Version	/T5 or /T8 On Request

Standard Fixing Detail
4qty x 6mm Ø Back Body Corner Mounting Holes
1qty x 20mm Ø Back Body Centre Cable Entry Hole

CE

5 YEAR WARRANTY
LED = L80B10 at 50,000 hours @ 25°C
(Full terms & conditions on request)